
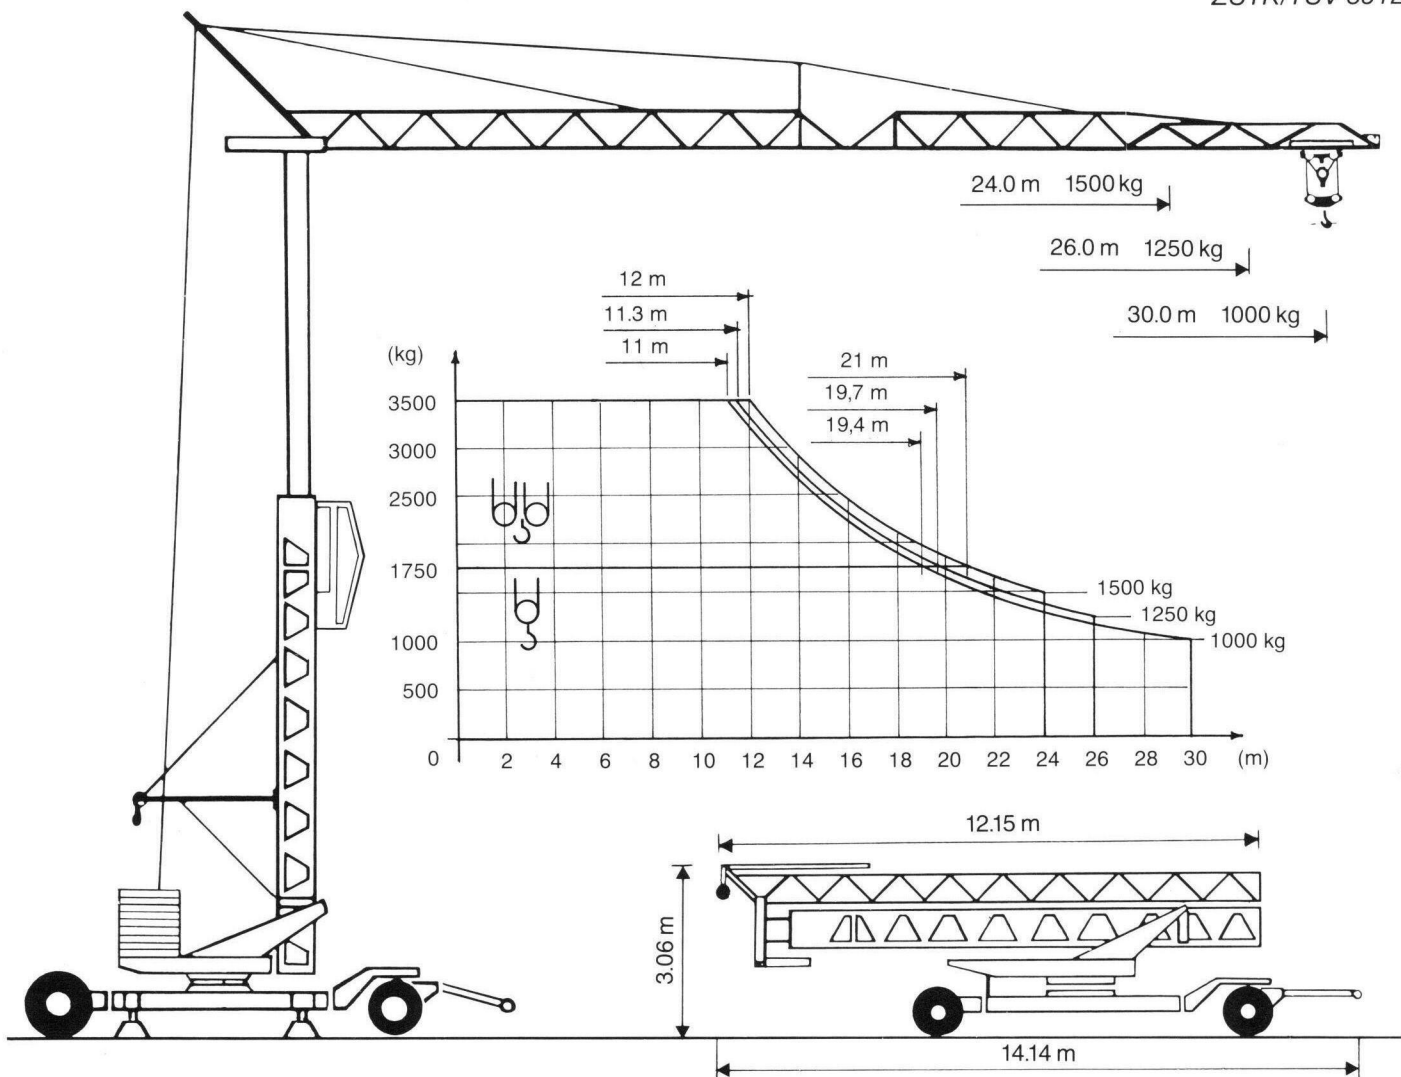



Conducta EURO-Kran E3010/20

Zul.-Nr.
SUVA 5386
ZUTK/TÜV 5912



Tragkraft Ausladung		kg	3500	1750	1500	1250	1000		Hakenhöhe hauteur s/crochet altezza gancio height of hook	15/20 m
	24 m	m	12.00	21.00	24.00				Abstützung ecartement de voie scartamento wheel gauge (track)	4.0 x 4.0 m
	26 m	m	11.30	19.70		26.00				
	30 m	m	11.00	19.40			30.00			
			  	40 m/min v = 20 m/min 3 m/min	1000 kg 1750 kg 1750 kg		Drehradius rayon de giration arrière raggio rotazione rotating radius		2.4 m	
			  	20 m/min v = 10 m/min 1.5 m/min	2000 kg 3500 kg 3500 kg		Konstruktionsgewicht poids de la grue peso della gru structural weight		10.5 t	
							Gegenballast contre poids zavorra contrappeso counterweight		20.5 t	
					v = 20/40 m/min		Eckdruck/Raddruck pression d'angle/charge par roue pressione su uno stabilizzatore corner pressure/wheel pressure		19.8 t	
					n = 0.2/0.6/0.9 U/min stufenlose, progressive Steuerung		Gesamt-Motorenleistung puissance totale des moteurs forza motrice totale total motor output		14 kW	
					v = 25 m/min		Kabelquerschnitt section du cable sezione del cavo sottogomma cable section		4 x 10 □	