


Conducta EURO-Kran E 3410

Zul.-Nr.
SUVA 3914
ZUTK/TÜV 5908

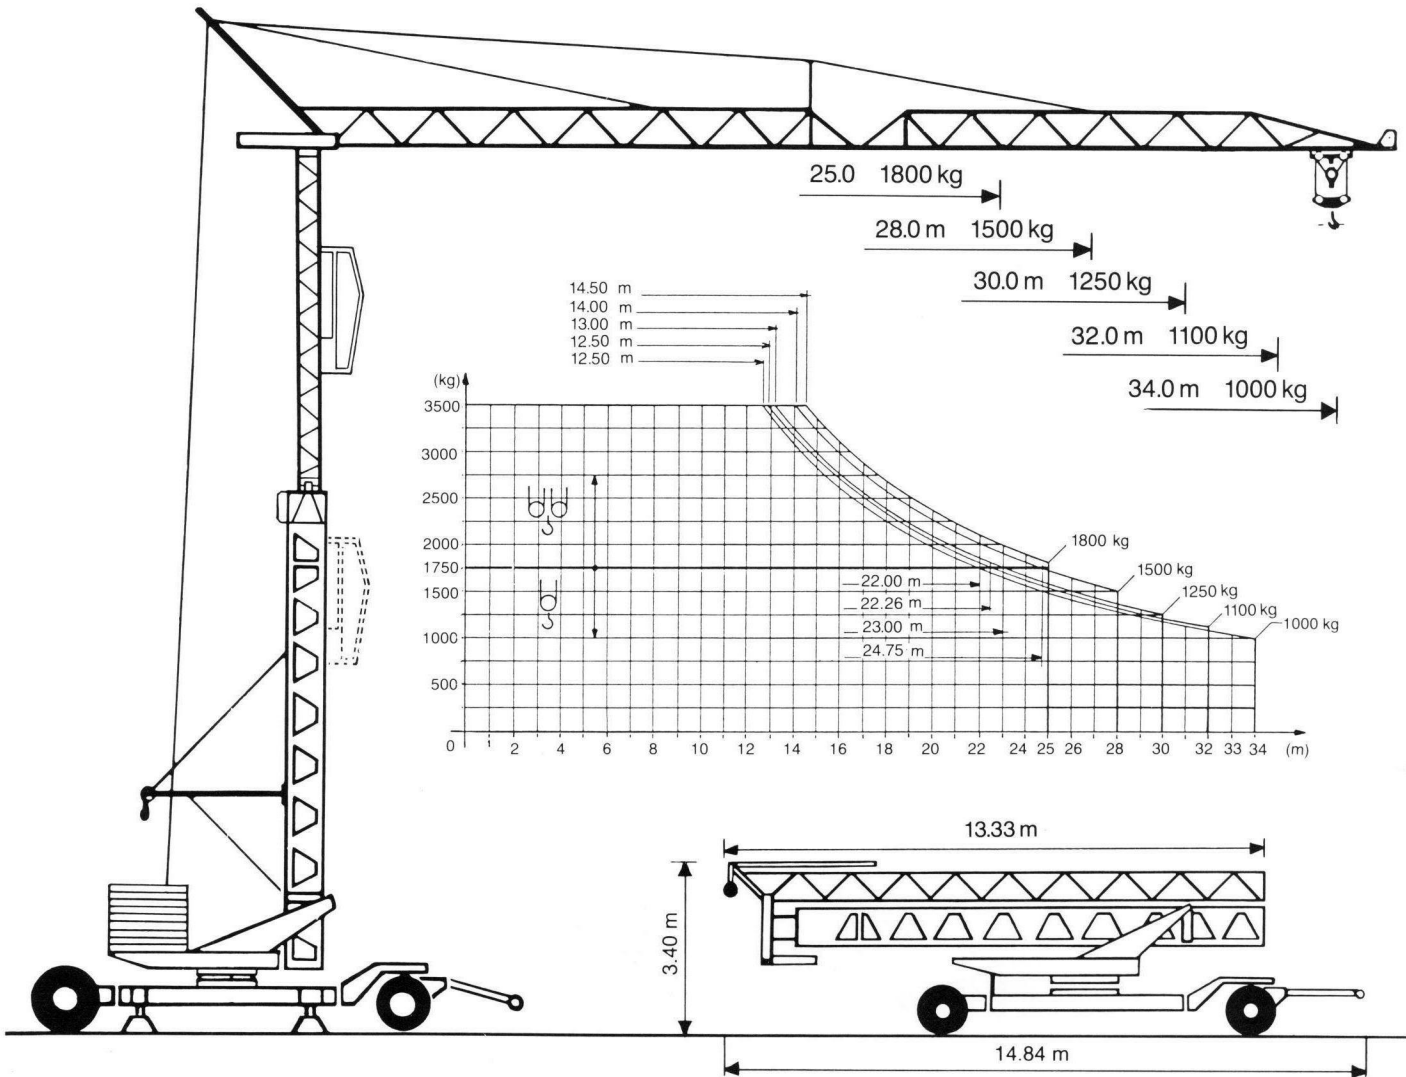

Tragkraft Ausladung	kg	3500	1750	1800	1500	1250	1100	1000	Hakenhöhe hauteur s/crochet altezza gancio height of hook	18/23 m
25 m	m	14.50		25.00					Abstützung ecartement de voie scartamento wheel gauge (track)	4.0 x 4.0 m
28 m	m	14.00	24.75		28.00					
30 m	m	13.00	23.00			30.00				
32m	m	12.50	22.26				32.00			
34 m	m	12.50	22.00					34.00	Drehradius rayon de giration arrière raggio rotazione rotating radius	2.50–3.05 m
	40 m/min 1500 kg								Konstruktionsgewicht poids de la grue peso della gru structural weight	13.5 t
	v = 20 m/min 1750 kg									
	3 m/min 1750 kg									
	20 m/min 3000 kg								Gegenballast contre poids zavorra contrappeso counterweight	24.4–22.0 t
	v = 10 m/min 3500 kg									
	1.5 m/min 3500 kg									
	v = 20/40 m/min								Eckdruck/Raddruck pression d'angle/charge par roue pressione su uno stabilizzatore corner pressure/wheel pressure	25.0–22.4 t
	n = 0.2/0.6/0.9 U/min stufenlose, progressive Steuerung								Gesamt-Motorenleistung puissance totale des moteurs forza motrice totale total motor output	18 kW
	v = 25 m/min								Kabelquerschnitt section du cable sezione del cavo sottogomma cable section	4 × 10 □