


SP 125 A

CITY \square 1,60m

Torre


KM 416 E

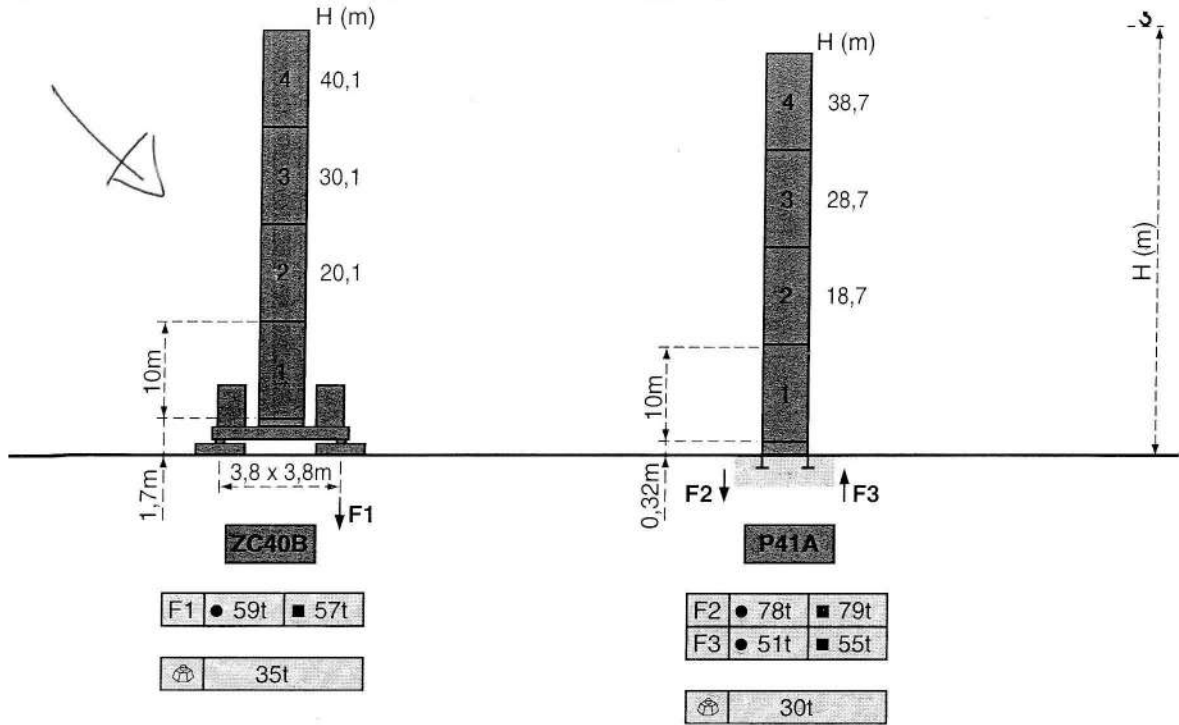

TELESCOPICO

Torre \square 1,60m

K 407 B



K 407 E

K 407 A




K 409 A

K 407 C



K40-K40

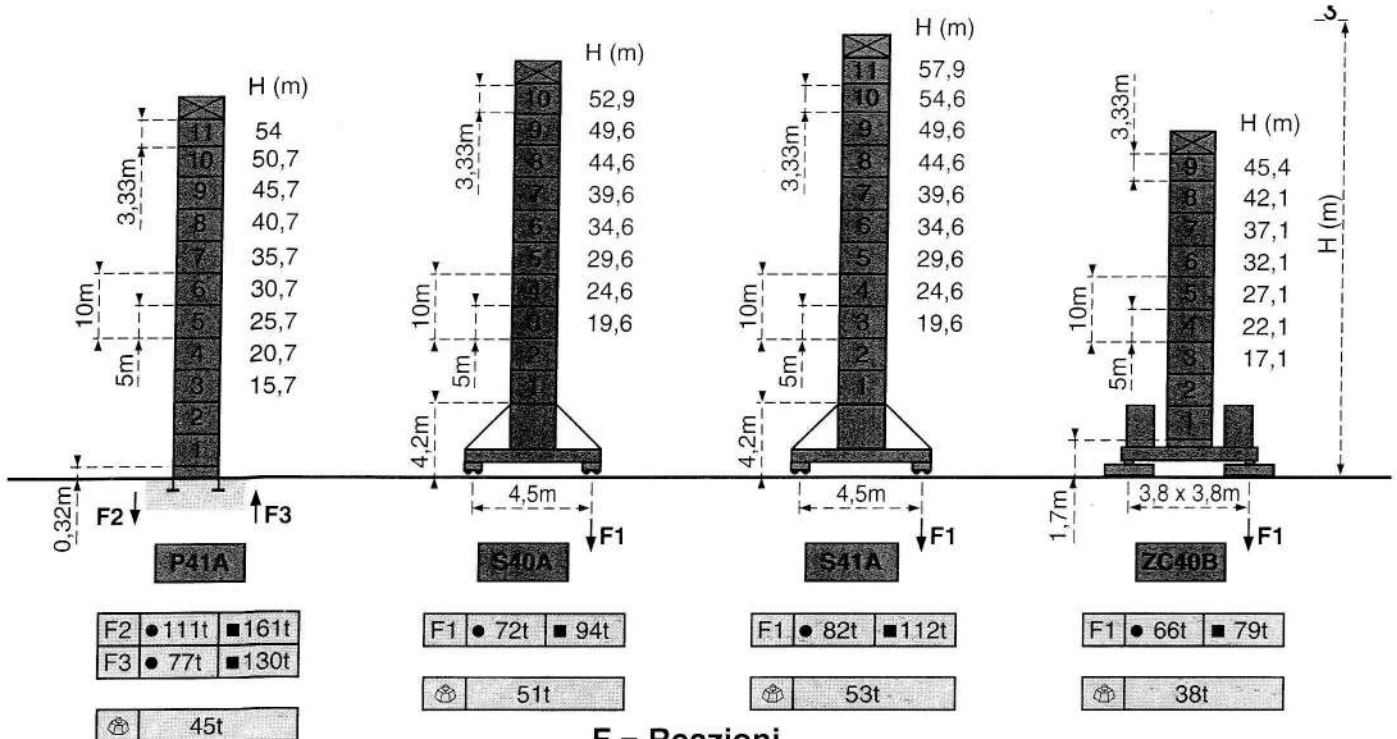

F = Reazioni

Curve di carico



Braccio

Braccio (m)	3,1	16,2	17	20	22	25	27	28,2	31,2	32	35	37	40	42	45	47	50	52	55	57,5
57,5m	6	5,7	4,6	4,1	3,5	3,2	3	3	2,9	2,6	2,45	2,25	2,1	1,9	1,8	1,7	1,6	1,5	1,4	
									31,2	32	35	37	40	42	45	47	50	52	55	57,5
									3	2,9	2,6	2,45	2,25	2,1	1,9	1,8	1,7	1,6	1,5	1,4

Braccio (m)	3,1	17,1	20	22	25	27	29,9	33	35	37	40	42	45	47	50	52	55	
55m	6	5	4,4	3,8	3,4	3	3	2,8	2,6	2,4	2,25	2,05	1,95	1,8	1,7	1,6		
									33	35	37	40	42	45	47	50	52	55
									3	2,8	2,6	2,4	2,25	2,05	1,95	1,8	1,7	1,6


Braccio (m)	3,1	20	22	25	27	30	32	34,9	38,6	40	42	45	47	50
50m	6	5,3	4,6	4,2	3,6	3,4	3	3	2,9	2,7	2,5	2,35	2,2	
									38,6	40	42	45	47	50
									3	2,9	2,7	2,5	2,35	2,2

Braccio (m)	3,1	20	22	25	27	30	32	34,9	38,6	40	42	45
45m	6	5,3	4,6	4,2	3,6	3,4	3	3	2,9	2,7	2,5	
									38,6	40	42	45
									3	2,9	2,7	2,5

Braccio (m)	3,1	20	22	25	27	30	32	34,9	38,6	40
40m	6	5,3	4,6	4,2	3,6	3,4	3	3	2,9	
									38,6	40
									3	2,9

Braccio (m)	3,1	20	22	25	27	30	32	35
35m	6	5,3	4,6	4,2	3,6	3,4	3	
								35
								3


Braccio (m)	3,1	20	22	25	27	30
30m	6	5,3	4,6	4,2	3,65	
						30
						3

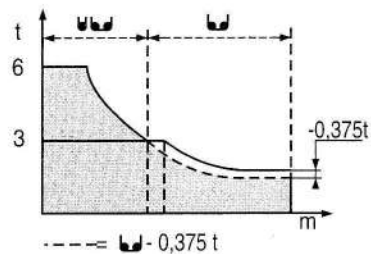

ZO
405



Altre soluzioni possibili

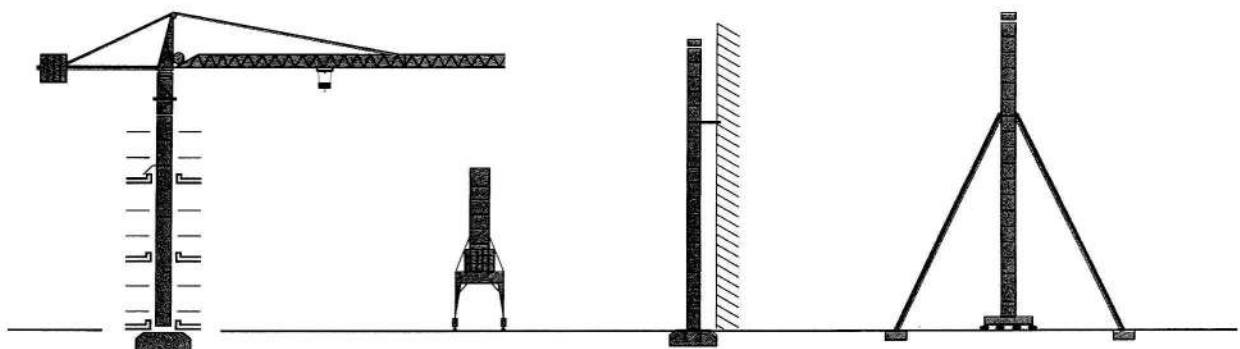



























Consultateci

- In servizio
- Fuori servizio
- ⊕ A vuoto senza zavorra e con braccio massimo e altezza massima.

SP 125 A

Meccanismi

				m/min	t		ch -PS hp	kW
Sollevamento	25 PC 15 			6	3	296 m >296 m *	25	18,4
				30	3			
				60	1,5			
				3	6			
				15	6			
				30	3			
	33 PC 15 			6,2	3	320 m >320 m *	33	24
				38	3			
				76	1,5			
				3,1	6			
				19	6			
				38	3			
Distribuzione		4 D3 V3	15 30 58			4	3	
Rotazione		RCV 145	0 → 0,8 tr/min.			2 x 6	2 x 4,4	
Traslazione	ZC40 	RT 224	25			2 x 4	2 x 2,9	
	S40A 	RT 324	12,5 - 25			2 x 7	2 x 5,2	
	TCV 449 ARC H ≤ 34,6 m R ≥ 10 m 	TCV 449 ARC H ≤ 34,6 m	10 - 50			4 x 6,8	4 x 5	
	S41A 	RT 443 A1 2V	15 - 30			4 x 5	4 x 3,7	
	TCV 449 ARC H ≤ 34,6 m R ≥ 10 m 	TCV 449 ARC H ≤ 34,6 m	10 - 50			4 x 6,8	4 x 5	
Rete elettrica						CEI 38	400V (+6%,-10%) 50Hz	
Potenza elettrica necessaria						25 PC : 35 KVA 33 PC : 50 KVA		
Gruppo elettrogeno						*		

* Consultateci

Conforme alle direttive CEE 84/534 e 87/405 sul livello acustico



Copyright.Reproduction interdite © POTAIN 1996



SIMMAPOTAIN

Simma Potain
via Archimede, 76
20041 Agrate Brianza (MI) Italia
Fax : 039 65 63330 - Tel : 039 65 631

SP 125 A

Réf. 1996.18.LJY 2

Modifiche riservate

Printed in France

Réalisation SODIPE