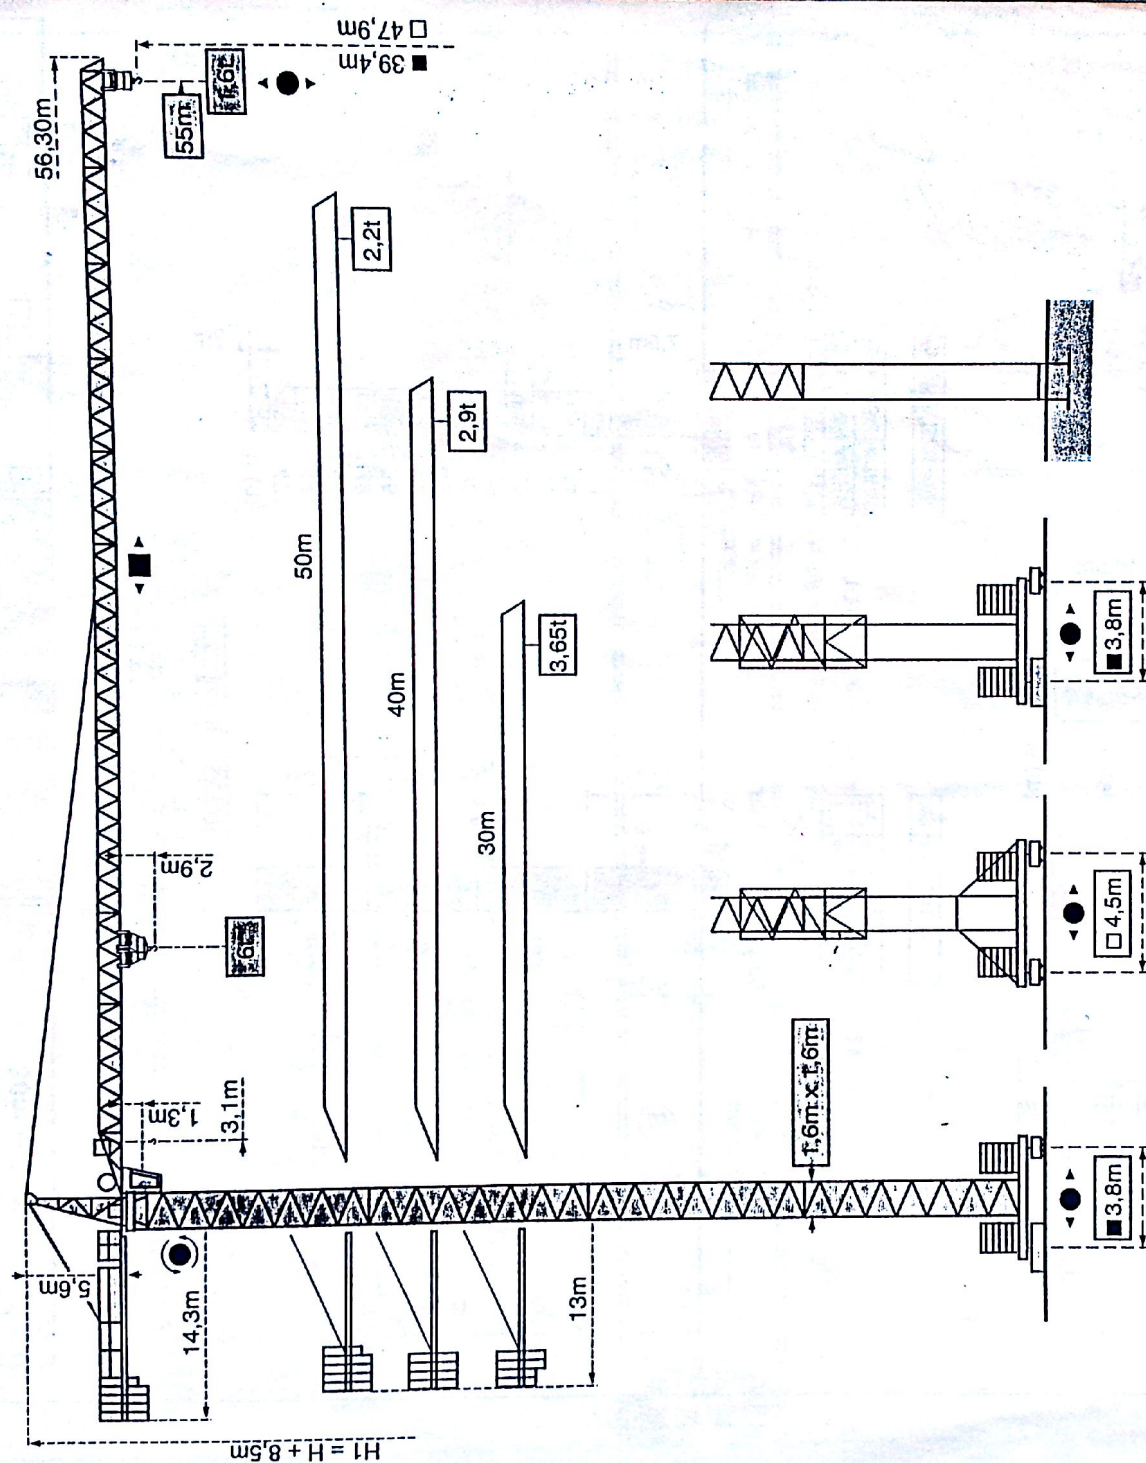




SP120

POTAIN®

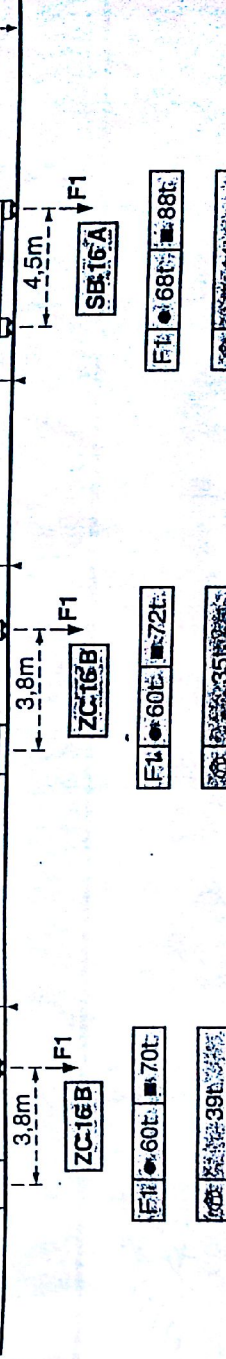
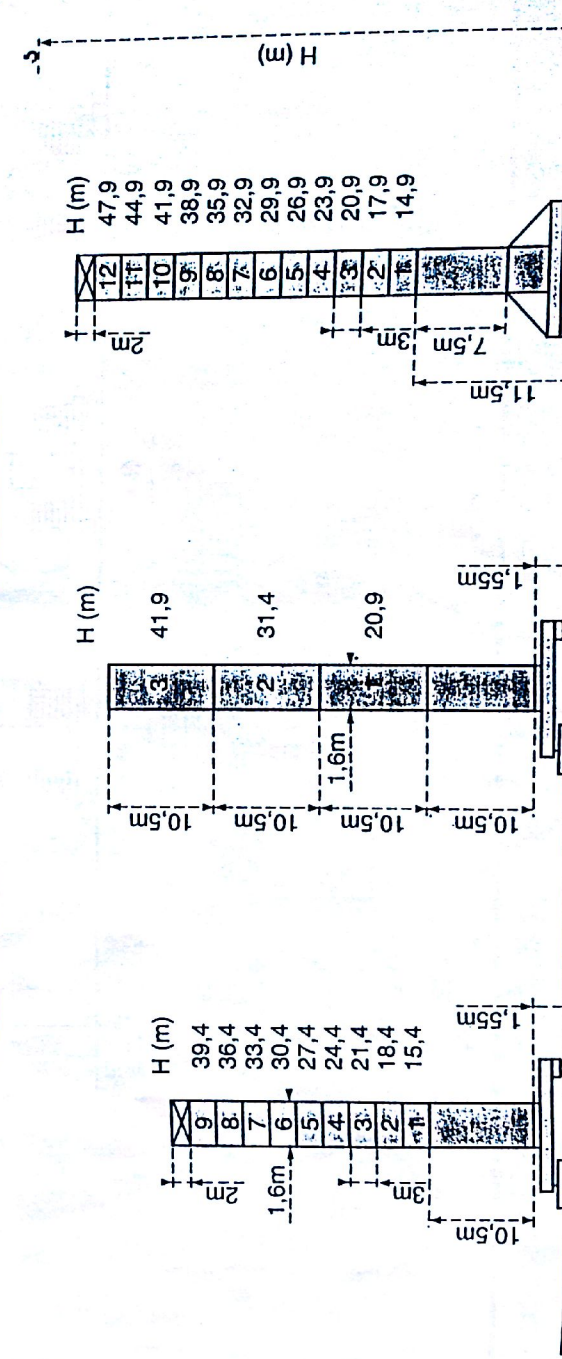
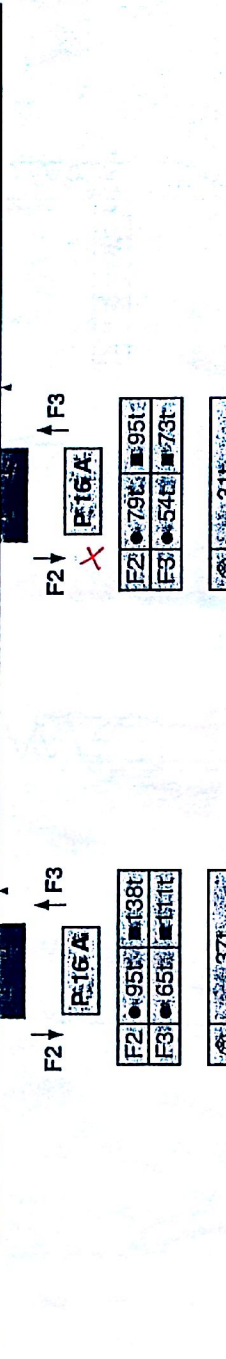
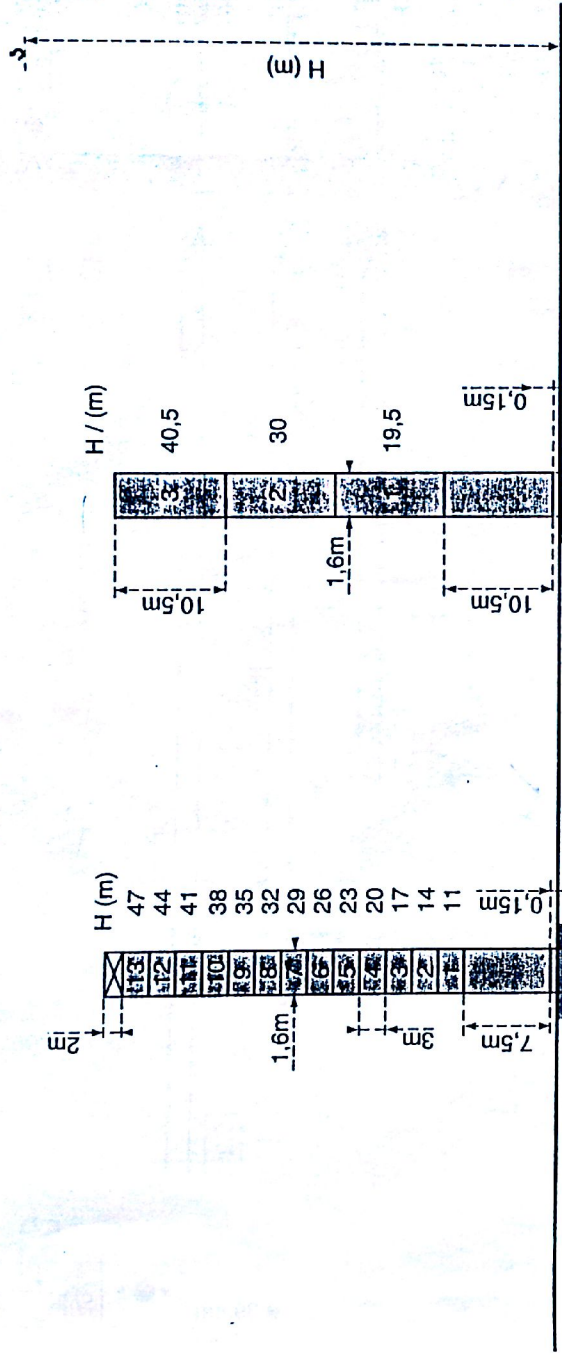


Masts - Maste - Mástil - Torre



Z 16m





Flèche - Ausleger - Jib
Flecha - Braccio
30m → 55m








F = Réactions - Eckdrücke - Reactions - Reacciones - Reazioni


Courbes de charges - Lastkurven - Load diagrams - Curvas de cargas - Curve di carico

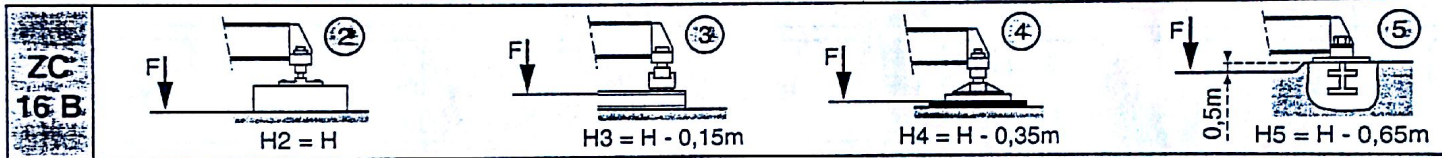
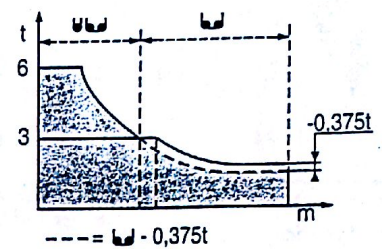
 Flèche Ausleger Jib Flecha Braccio

	17	20	22	25	27	29,8	33	35	37	40	42	45	47	50	52	55	m
 / 	6	4,97	4,42	3,77	3,41	3,3	3	2,79	2,61	2,38	2,24	2,06	1,95	1,8	1,72	1,6	t
55 m 							33	35	37	40	42	45	47	50	52	55	m
							3	2,79	2,61	2,38	2,24	2,06	1,95	1,8	1,72	1,6	t

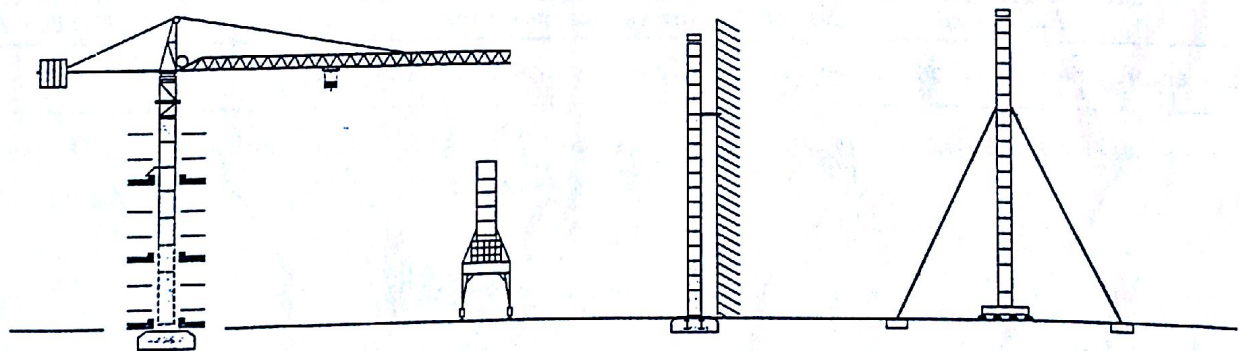
	19,95	22	25	27	30	33	34,8	38,5	40	42	45	47	50	m
 / 	6	5,33	4,56	4,15	3,65	3,22	3	2,87	2,71	2,5	2,37	2,2		t
50 m 							38,5	40	42	45	47	50		m
							3	2,87	2,71	2,5	2,37	2,2		t

	19,95	22	25	27	30	33	34,8	38,5	40	m
 / 	6	5,33	4,56	4,15	3,65	3,22	3	2,87		t
40 m 							38,5	40		m
							3	2,87		t

	19,95	22	25	27	30	m
 / 	6	5,33	4,56	4,15	3,65	t
30 m 						30 m
						t



Autres implantations - Aufstellmöglichkeiten - Mounting possibilities Otras implantaciones - Altre soluzioni possibili














Nous consulter
Auf anfrage
Consult us
Consultarnos
Consultateci

- | | | | | |
|--|--|---|---|--|
| ● En service
■ Hors service | ● In Betrieb
■ Ausser Betrieb | ● In service
■ Out of service | ● En servicio
■ Fuera de servicio | ● In servizio
■ Fuori servizio |
| ⊗ A vide sans lest avec flèche et hauteur maximum. | ⊗ Ohne Last und Ballast mit Maximalausleger und Maximalhöhe. | ⊗ Without load and ballast with longest jib and maximum height. | ⊗ Sin carga, sin lastre con flecha y altura máxima. | ⊗ A vuoto senza zavorra e con braccio massimo e altezza massima. |

Mécanismes - Antriebe - Mechanisms - Mecanismos - Meccanismi

				m/min	t		ch -PS hp	kW	
Levage Heben Hoisting Elevación Sollevamento	     			6	3	296 m >296 m *	25	18,4	
				30	3				
				60	15				
				6	6				
				15	6				
				30	3				
		     			6,2	6	320 m >320 m *	33	24
					38	6			
					76	15			
					6,1	6			
					15	6			
					38	6			

Distribution - Katzfahren - Trolleying Distribución - Distribuzione		4 D3 V3	  			4	3
Orientation - Schwenken - Slewing Orientación - Rotazione		RCV 145	  			2 x 6	2 x 4,4

Translation Kranfahren Travelling Traslación Traslazione	     R ≥ 10 m	RT224	  			2 x 4	2 x 2,9
		RT 324	  			2 x 7	2 x 5,2
		TCV 449 ARC H ≤ 32,9m	  			4 x 6,8	4 x 5

Réseau - Netzstrom - Mains supply - Red - Rete elettrica						CEI 38 IEC 38	400V (+6%,-10%) 50Hz
Puissance électrique nécessaire - Anschlusswert - Necessary electric power Potencia eléctrica necesaria - Potenza elettrica necessaria							25 PC : 35 KVA 33 PC : 50 KVA
Groupe électrogène - Stromaggregat - Generator set - Grupo electrogeno - Gruppo elettrogeno							*

* Nous consulter - Auf Anfrage - Consult us - Consultarnos - Consultateci

Conforme aux directives CEE 84/534 et 87/405 sur le niveau acoustique - Gemäss EWG-Richtlinien 84/534 und 87/405 für den Schall- Leistungspegel
 In compliance with the EEC 84/534 and 87/405 Instructions on noise level - Conforme con las directivas CEE 84/534 y 87/405 sobre el nivel acustico
 Conforme alle direttive CEE 84/534 e 87/405 sul livello acustico



Copyright.Reproduction interdite © POTAIN 1994



SIMMAPOTAIN