


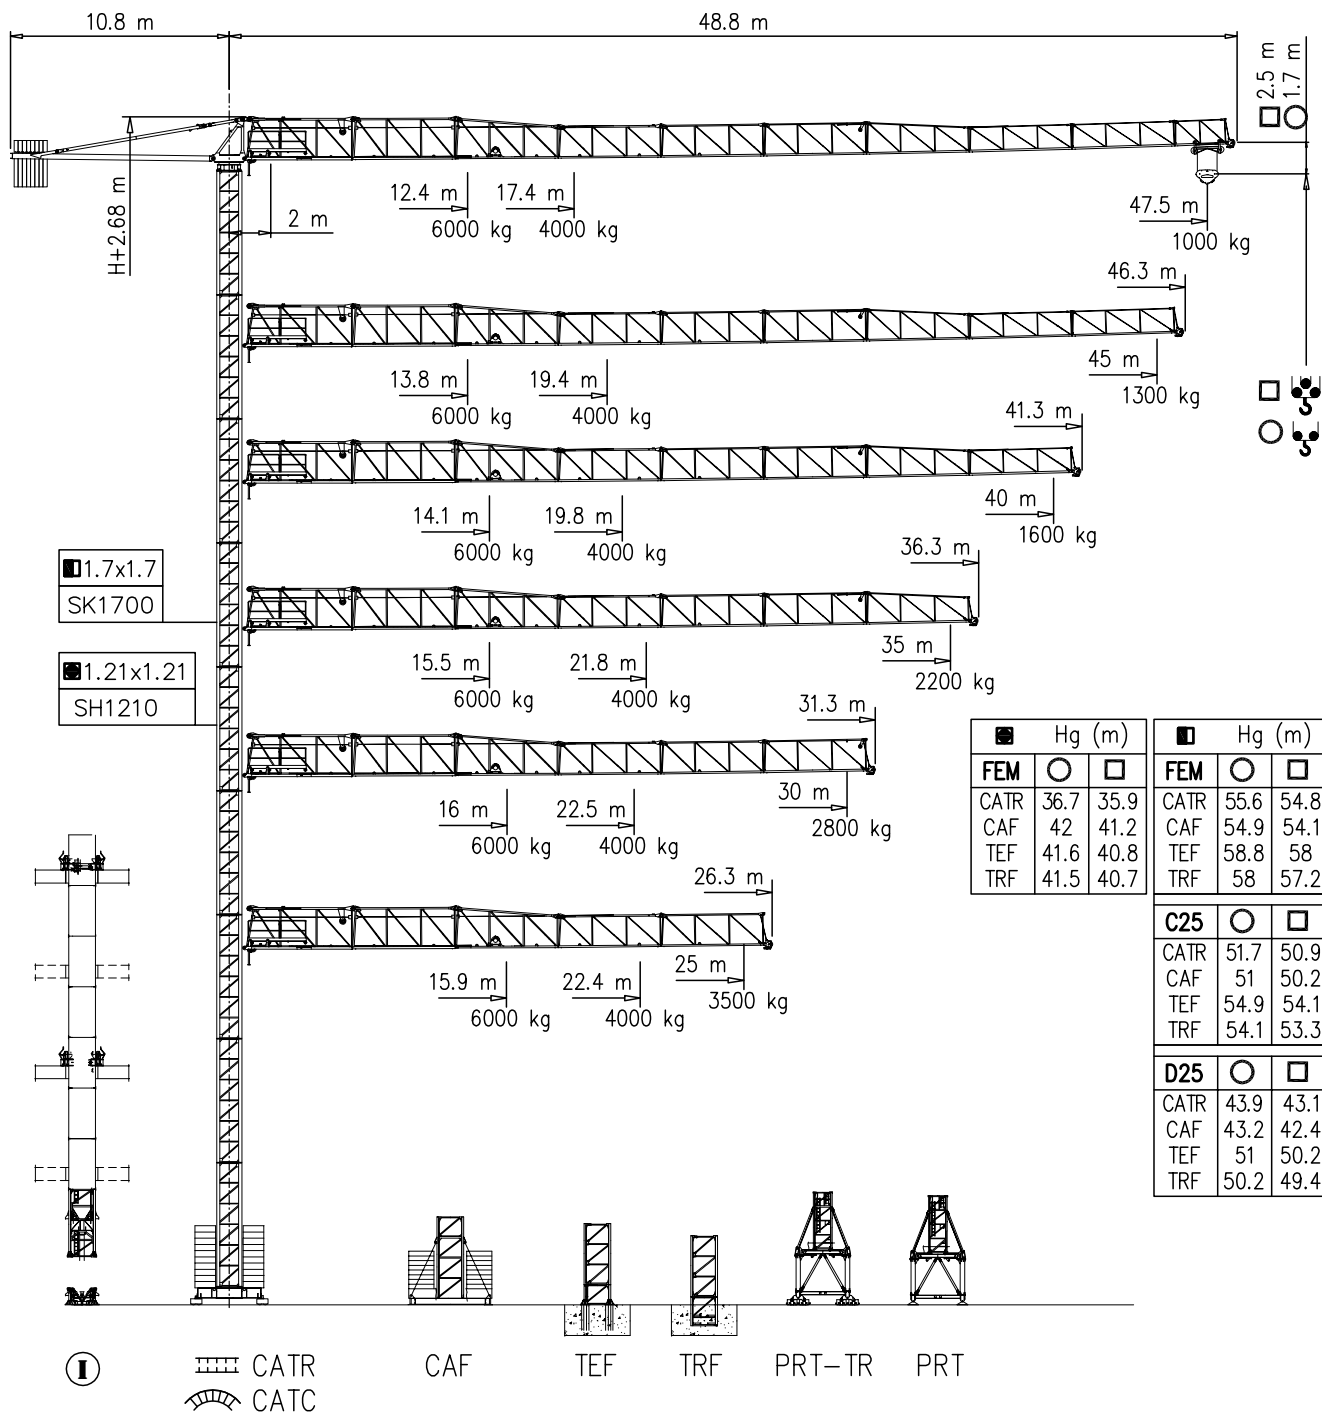


	Hg (m)	
FEM	○	□
CATR	36.7	35.9
CAF	42	41.2
TEF	41.6	40.8
TRF	41.5	40.7

	Hg (m)	
FEM	○	□
CATR	55.6	54.8
CAF	54.9	54.1
TEF	58.8	58
TRF	58	57.2

C25		
	○	□
CATR	51.7	50.9
CAF	51	50.2
TEF	54.9	54.1
TRF	54.1	53.3

D25		
	○	□
CATR	43.9	43.1
CAF	43.2	42.4
TEF	51	50.2
TRF	50.2	49.4





FEM 1.001 - A4
EN 14439 - C25 - D25


Torre/Reazioni – Masts/Reactions – Mat/Réactions – Maste/Eckdrücke – Măstil/Reacciones – Tramo/Reacções

SH1210 FEM


○ Hg=Ht-1 m
□ Hg=Ht-1.8 m






4	B0120	2/2
3	B0060	2/2
2	ST030	2/2
1	ST060	2/2

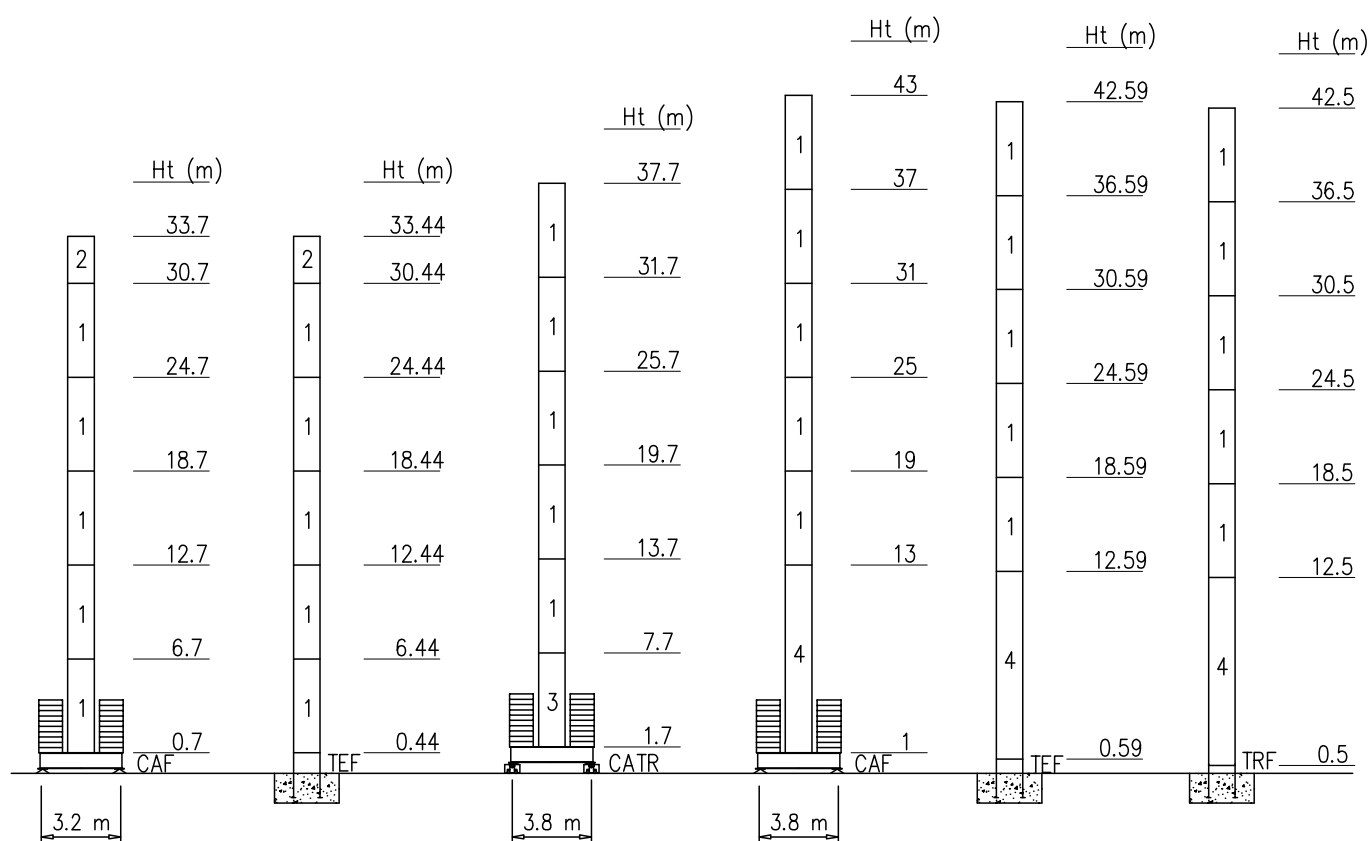

Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre



SH1210	
H-CATR (m)	37.7
FEM (t)	60
n°	20xA





SH1210		
H-CAF32 (m)	18.7	33.7
FEM (t)	36	54
n°	12xB	18xB


SH1210				
H-CAF38 (m)	18.7	33.7	36.7	42.7
FEM (t)	36	54	60	72
n°	12xA	18xA	20xA	24xA

Torre/Reazioni – Masts/Reactions – Mat/Réactions – Maste/Eckdrücke – Măstil/Reacciones – Tramo/Reacções


SK1700 FEM

○ Hg=Ht-1 m
□ Hg=Ht-1.8 m




4	BPF039	4/4
3	ST117	2/2
2	BAF117	4/2
1	ST039	2/2

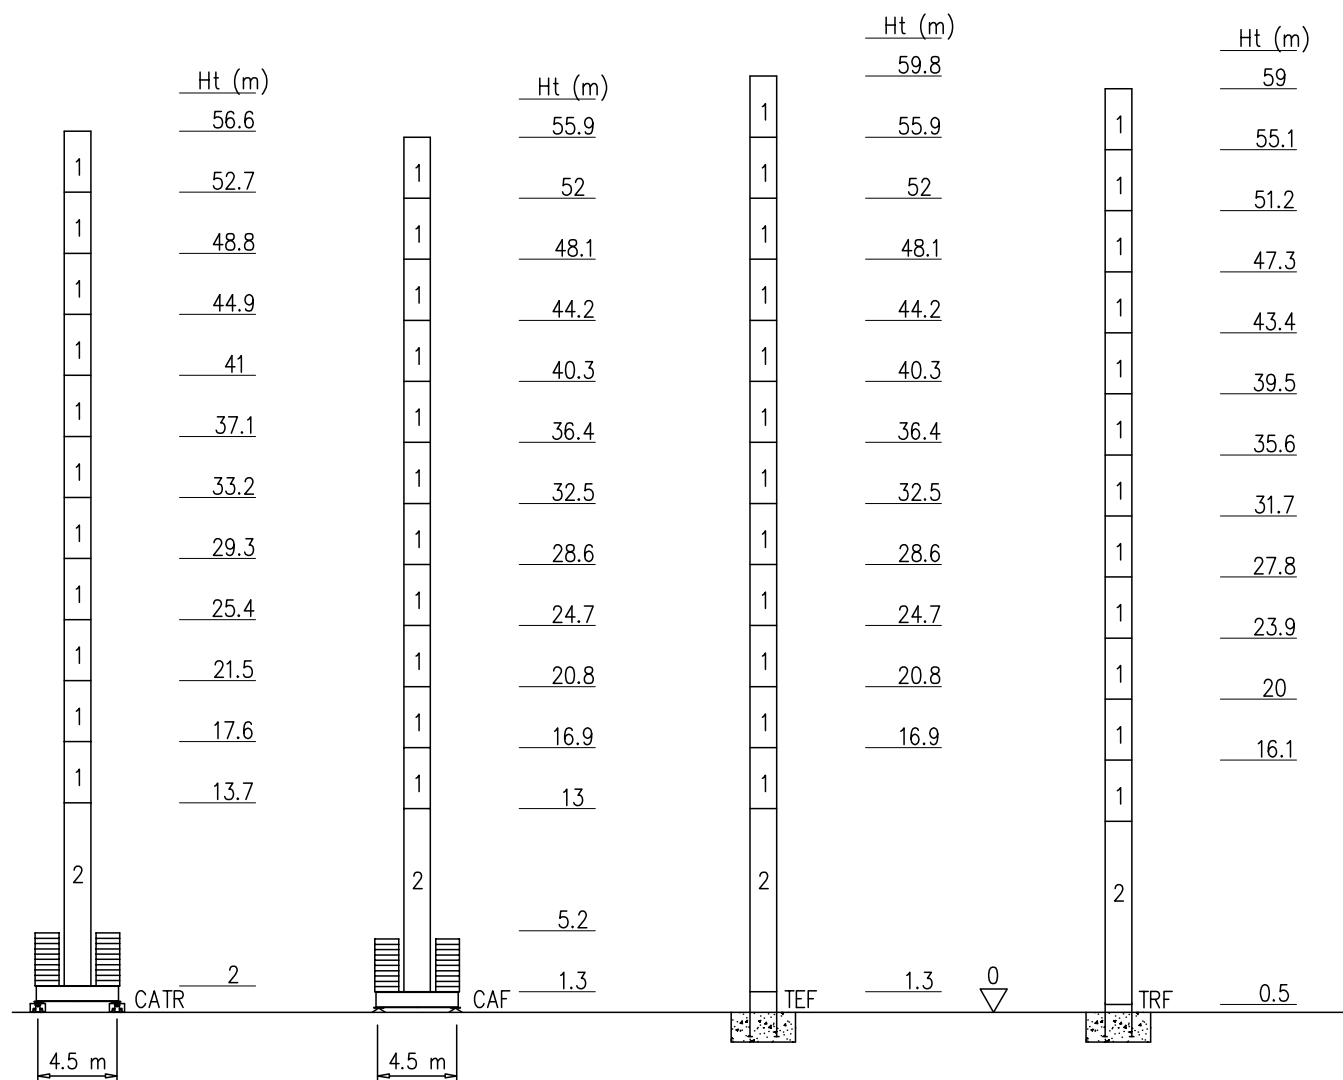

Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre





SK1700			
H-CATR (m)	48.8	52.7	56.6
FEM (t)	105	119	126
n°	30xA	34xA	36xA




SK1700									
H-CAF (m)	24.7	28.6	32.5	36.4	40.3	44.2	48.1	52	55.9
FEM (t)	63	63	63	63	77	84	105	119	126
n°	18xA	18xA	18xA	18xA	22xA	24xA	30xA	34xA	36xA

Torre/Reazioni – Masts/Reactions – Mat/Réactions – Maste/Eckdrücke – Măstil/Reacciones – Tramo/Reacções


SK1700 EN14439-C25


○ Hg=Ht-1 m
□ Hg=Ht-1.8 m



4	BPF039	4/4
3	ST117	2/2
2	BAF117	4/2
1	ST039	2/2

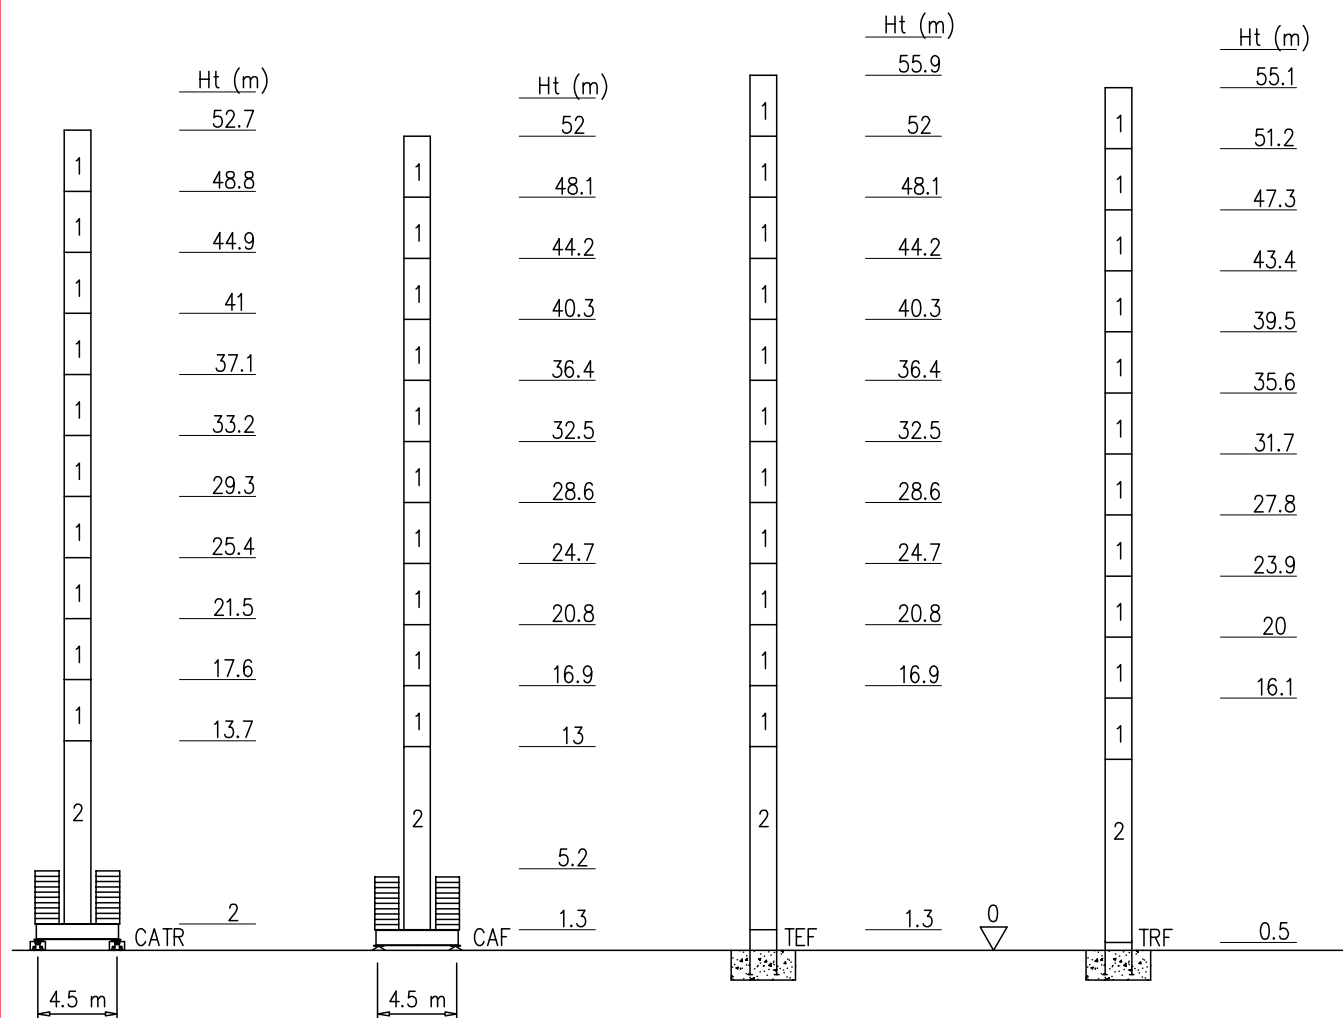

Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre





SK1700		
H-CATR (m)	48.8	52.7
(t)	119	126
n°	34xA	36xA




SK1700								
H-CAF (m)	24.7	28.6	32.5	36.4	40.3	44.2	48.1	52
(t)	63	63	63	63	84	98	112	119
n°	18xA	18xA	18xA	18xA	24xA	28xA	32xA	34xA

Torre/Reazioni – Masts/Reactions – Mat/Réactions – Maste/Eckdrücke – Măstil/Reacciones – Tramo/Reacções


SK1700 EN14439-D25


○ Hg=Ht-1 m
□ Hg=Ht-1.8 m


4	BPF039	4/4
3	ST117	2/2
2	BAF117	4/2
1	ST039	2/2

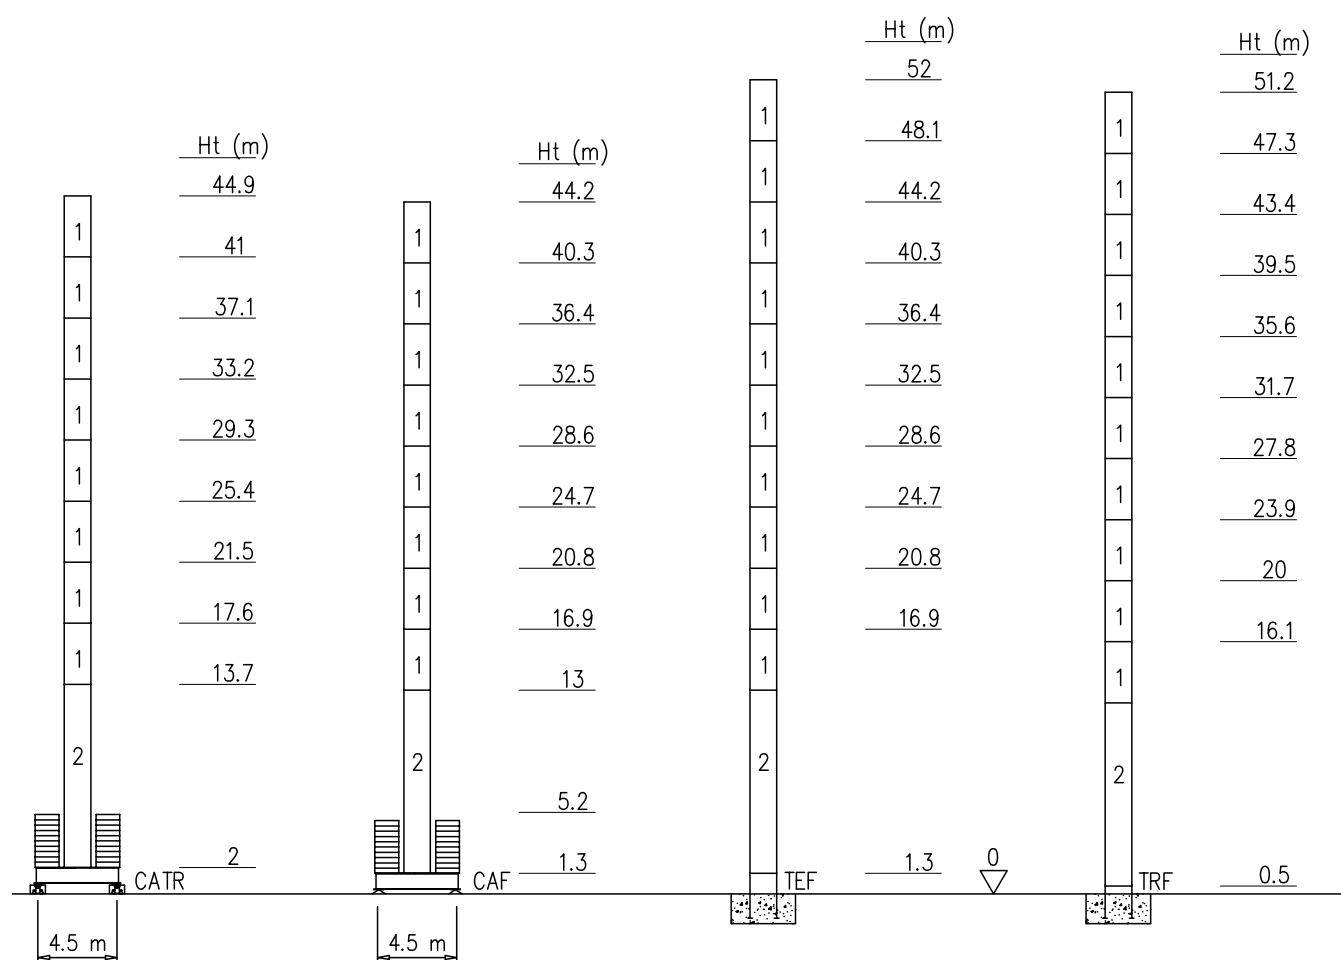


Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre



SK1700	
H-CATR (m)	44.9
(t)	126
n°	36xA



A=3.5 t



SK1700						
H-CAF (m)	24.7	28.6	32.5	36.4	40.3	44.2
(t)	63	63	63	105	119	126
n°	18xA	18xA	18xA	30xA	34xA	36xA

Curve di carico – Courbes de charges – Load diagrams – LastKurven – Curvas de cargas

Pmax 2500 kg

	12000 kg		2	25	27.5	30	32.5	35	37.5	40	42.5	45	47.5	m
			2500	2500	2460	2110	1910	1730	1580	1450	1340	1230	1000	kg
	12000 kg		2	28	30	32.5	35	37.5	40	42.5	45			m
			2500	2500	2360	2120	1900	1720	1560	1420	1300			kg
	10800 kg		2	28.7	30	32.5	35	37.5	40					m
			2500	2500	2400	2160	1940	1760	1600					kg
	10800 kg		2	31.7	32.5	35								m
			2500	2500	2320	2200								kg
	9600 kg		2	30										m
			2500	2500										kg
	8400 kg		2	25										m
			2500	2500										kg
	7200 kg		2	20										m
			2500	2500										kg
	6000 kg		2	15										m
			2500	2500										kg



Pmax 6000/3000 kg

	12000 kg		2	12.4	15	17.5	20	22.5	27.5	30	32.5	35	37.5	40	42.5	45	47.5	m
			6000	6000	5450	4500	3900	3000	2460	2110	1910	1730	1580	1450	1340	1230	1000	kg
	12000 kg		2	13.8	15	17.5	20	22.5	24.5	27.5	30	32.5	35	37.5	40	42.5	45	m
			6000	6000	5450	4500	3900	3370	3000	2650	2360	2120	1900	1720	1560	1420	1300	kg
	10800 kg		2	14.1	15	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40			m
			6000	6000	5450	4500	3900	3370	3000	2690	2400	2160	1940	1760	1600			kg
	10800 kg		2	15.5	15	17.5	20	22.5	25	28.5	30	32.5	35					m
			6000	6000	5450	4500	4100	3700	3400	3000	2500	2320	2200					kg
	9600 kg		2	16	17.5	20	22.5	25	29	30								m
			6000	6000	4500	4100	3700	3400	3000	2800								kg
	8400 kg		2	15.9	17.5	20	22.5	25										m
			6000	6000	4500	4100	3700	3500										kg
	7200 kg		2	15	17.5	20												m
			6000	6000	4500	4000												kg
	6000 kg		2	15														m
			6000	6000														kg






Pmax 4000/2000 kg








	12000 kg		2	17.4	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	47.5	m
			4000	4000	3410	2990	2630	2460	2110	1910	1730	1580	1450	1340	1230	1000	kg
	12000 kg		2	19.4	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	m		
			4000	4000	3370	2970	2650	2360	2120	1900	1720	1560	1420	1300	kg		
	10800 kg		2	19.8	22.5	25	27.5	30	32.5	35	37.5	40	m				
			4000	4000	3520	3100	2690	2400	2160	1940	1760	1600	kg				
	10800 kg		2	21.8	25	27.5	30	32.5	35	m							
			4000	4000	3560	3180	2870	2320	2200	kg							
	9600 kg		2	22.5	25	27.5	30	m									
			4000	4000	3730	3360	2800	kg									
	8400 kg		2	22.4	25	m											
			4000	4000	3900	kg											
	7200 kg		2	20	m												
			4000	4000	kg												
	6000 kg		2	15	m												
			4000	4000	kg												




PESI E INGOMBRI – PACKING LIST – LISTE DE COLISAGE – GEWICHT UND ABMESSUNGEN



Denominazione Description	Disegno Draw	Pezzi Pieces	Dimensioni-Dimensions (mm)			Peso-Weight (kg)			
			L	W	H	Unit	Total		
Elemento di braccio Jib element Elèment de èche Elemento de flecha	n°9	 	1	5500	1480	2290	1163	—	
	n°8	 	1	5260	1200	2150	722	—	
	n°7	 	1	5225	1200	2060	635	—	
	n°6	 	1	5200	1200	1630	500	—	
	n°5	 	1	5160	1200	1630	370	—	
	n°4	 	1	5140	1200	1610	350	—	
	n°3	 	1	5110	1200	1610	250	—	
	n°2	 	1	5090	1200	1260	210	—	
	n°1	 	1	5090	1200	1260	200	—	
	Punta braccio	 	1	700	1200	500	55	—	
Controbraccio completo Complete counterjib Contreflèche complète Contraflecha completa		1	10660	1750	1480	1850	—		
Gruppo girevole Slewing group Table tournante Grupo giratorio	SK1700	 w/	1	2300	1810	2900	5900	—	
	S1200	 w/	1	2450	1810	2900	3000	—	
Carrello Trolley Chariot Carretilla	P6	 w/	1	1600	1620	710	320	—	
Ballatoio con cabina Access balcony with cabin Porte cabine Balcòn corrido con cabina	 w/	1	2500	2150	2450	1000	—		
Blocchi contrappeso Counterweight block Contre-poids Bloques de contrapeso	VX24 VS12		VS12	2	1000	200	2500	1200	2400
	VX24		4	1000	400	2500	2400	9600	
Elemento di torre Mast element Elèment de mature Elemento de torre	ST039 BPF039	 	SK1700	—	3900	1785	1785	1750 2350	—
	STD052	 	SK1700	—	5200	1785	1785	2250	—
	STD117	 	SK1700	—	11700	1785	1785	4690	—



PESI E INGOMBRI – PACKING LIST – LISTE DE COLISAGE – GEWICHT UND ABMESSUNGEN

Denominazione Description	Disegno Draw		Pezzi Pieces	Dimensioni-Dimensions (mm)			Peso-Weight (kg)	
				L	W	H	Unit	Total
Elemento di torre Mast element Elèment de mature Elemento de torre	ST030 	SH1210	—	3000	1210	1210	840	—
	ST060 	SH1210	—	6000	1210	1210	1490	—
	ST120 	SH1210	—	12000	1210	1210	3000	—
	BO060 	SH1210	—	6000	1210	1210	2120	—
	BO120 	SH1210	—	12000	1210	1210	3500	—
	BL060 	SH1210	—	6000	—	—	—	—
Elemento di base Base element Mat de base Elemento de base	BAF117 	SK1700	—	11700	1785	1785	4690	—
Carro di base Base carriage Chassis de base Cruceta de base		3.2x3.2	1	4670	520	660	1160	1160
		3.8x3.8	1	5700	520	660	2280	2280
		4.5x4.5	1	6670	500	1260	3180	3180
		3.2x3.2	2	2180	340	660	550	1100
		3.8x3.8	2	2700	340	660	1090	2180
		4.5x4.5	2	3100	500	1260	1400	2800
Elemento a perdere Disposable frame Chassis a perdre Bastidor desechable		SH1210	1	2015	1210	1210	800	—
		SK1700	1	1840	1910	1910	1430	—
Elemento recuperabile Recoverable frame Chassis récupèrable Bastidor recuperable		SH1210	1	400	1700	1700	610	—
		SK1700	1	1300	2170	2170	1720	—
Bogie di traslazione Driven bogie Boggie motorisee Balancin de traslaciòn			4	1160	700	600	700	2800
Blocco zavorra di base Base ballast block Lest de base Blok de lastre		3.2x3.2	—	3600	1150	300	3000	—
		3.8x3.8	—	4000	1200	270	3000	—
		4.5x4.5	—	4400	1200	290	3500	—
Corsoio di montaggio Climbing cage Cage de montage Jaula de montaje		SG1200	1	8300	1600	1500	3000	—
		SK1700	1	8300	2600	2500	6000	—

GRU IN CAVEDIO – TELESCOPAGE SUR DALLES – CLIMBING CRANE – KLETTERKRANE IM GEBAUDE

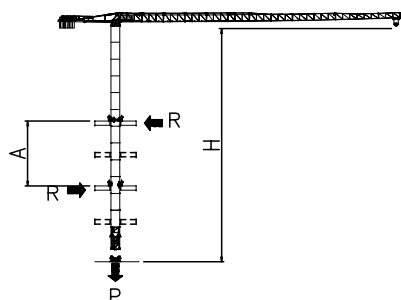


SK1700	H (m)	A (m)
	39	Min 9
		Max 12

SH1210	H (m)	A (m)
	30	Min 6
		Max 9


SOPRALZO IDRAULICO – TELESCOPABLE – EXTERNAL CLIMBING – KLETTERKRANE

FEM

	SK1700
MAX C	32.5 m
B	19.5 m
A	46.8 m

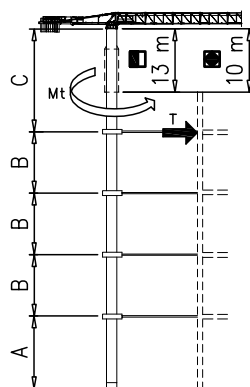

	SH1210
MAX C	27 m
B	17 m
A	32.5 m

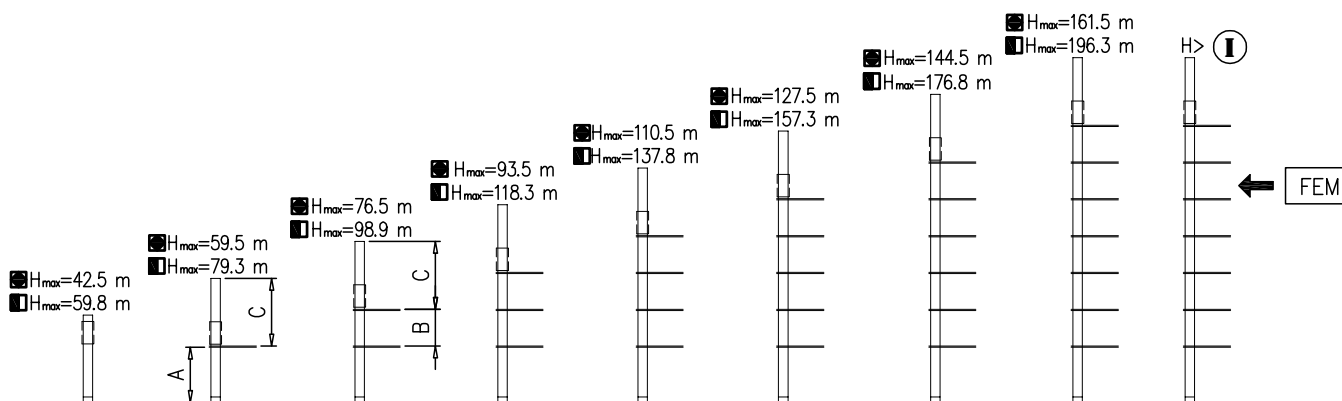

Montaggio – Montage – Erection – Montage – Montaje – Montagem

